

# (12) UK Patent Application (19) GB (11) 2 230 730 (13) A

(43) Date of A publication 31.10.1990

(21) Application No 9008471.6

(22) Date of filing 12.04.1990

(30) Priority data

(31) 8909781

(32) 28.04.1989

(33) GB

(71) Applicant

MJS (Scientific) Limited

(Incorporated in the United Kingdom)

Unit 16, Murrills Estate, East Street, Porchester,  
Hants, PO16 9XT, United Kingdom

(72) Inventor

Michael James Sealey

(74) Agent and/or Address for Service

Gill Jennings & Every

53-64 Chancery Lane, London, WC2A 1HN,  
United Kingdom

(51) INT CL<sup>a</sup>

B29D 11/00

(52) UK CL (Edition K)

B5A AD34 AMC A1R314C2X A1R442 A2E1A A2E11  
A2E12B A2K2 A20T3

(56) Documents cited

GB 2216065 A

GB 0824960 A

GB 0577467 A

US 4580149 A

(58) Field of search

UK CL (Edition K) B5A AD34 AMA AMC AT3P

INT CL<sup>a</sup> B29D

## (54) Cast plastics contact lens mould

(57) The mould comprises cast plastics mould parts (4) and (5) defining a moulding cavity (8) and a reservoir (11) from which polymerisable material can be drawn into the moulding cavity to compensate for shrinkage. The top of the reservoir 11 is sealed at annular mould flanges (14, 15), to avoid loss of volatile solvent from the polymerisable material and hence maintain the composition of the material, either by complementary abutments (12, 13) which engage at inclined surfaces (16), or by an abutment engaging the other flange at a knife edge. The mould part (4) is deflected by a spring, along a patch (17), into contact with mould part (5) around the periphery of the cavity (8).

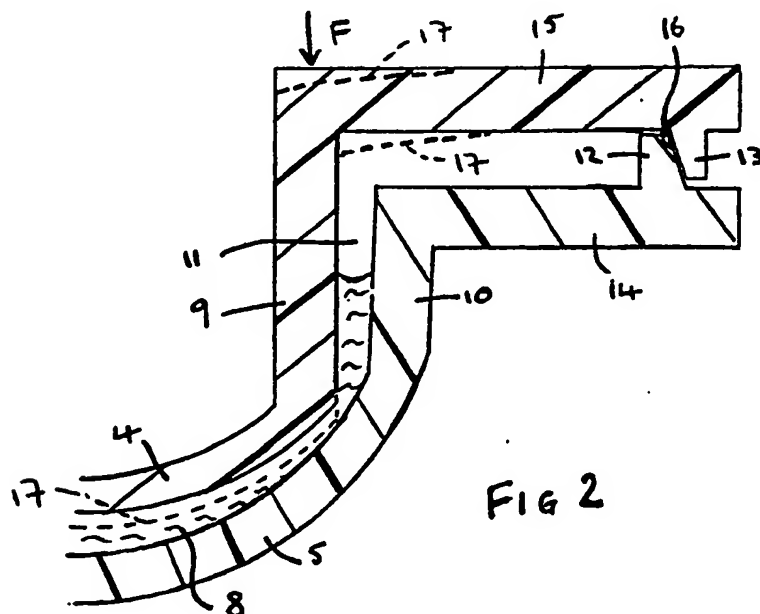


FIG 2

GB 2 230 730 A

Fig.1.

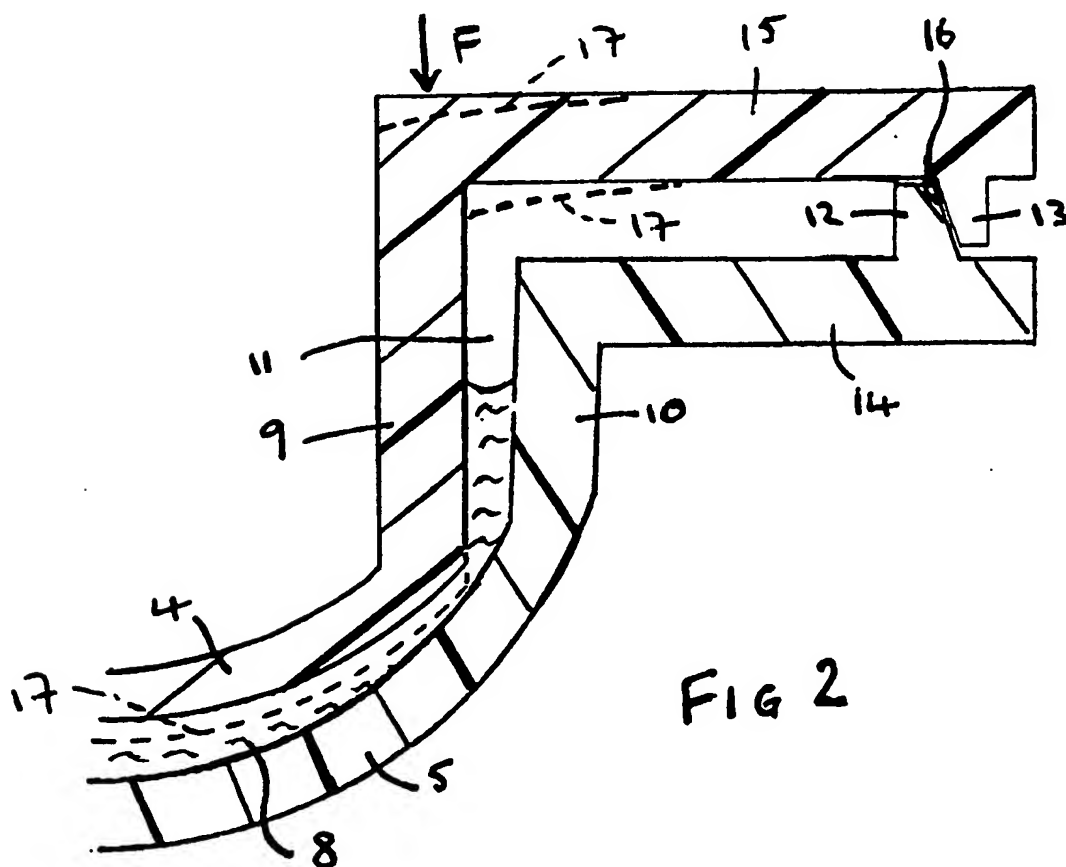
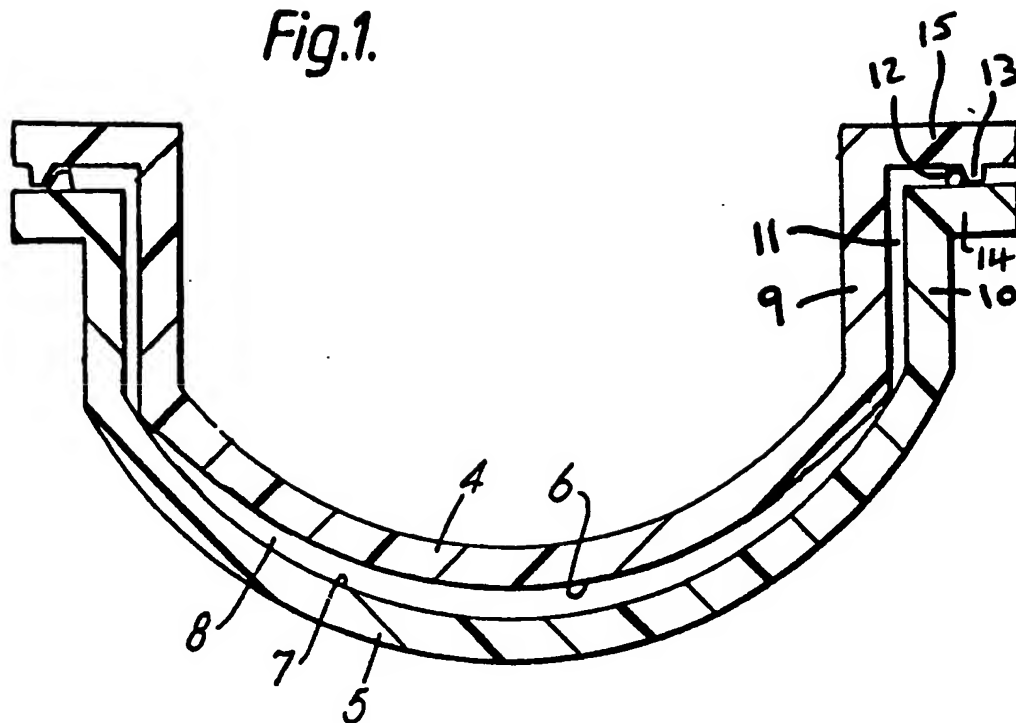


FIG 2

DESCRIPTIONLENS MOULD

5           A technique, which has recently become popular  
for the manufacture of ophthalmic correction contact  
lenses from plastics material, is known as cast  
moulding. In this technique, two plastics mould  
10 parts with convex and concave moulding surfaces are  
cast from master dies and are subsequently juxtaposed  
to provide a moulding cavity between the convex and  
concave moulding surfaces. A polymerisable liquid is  
polymerised within the moulding cavity to form a  
contact lens, whereafter the mould parts are  
15 separated to release the lens and are disposed of.

When the mould parts are juxtaposed, they  
substantially abut one another at the peripheral edge  
of the moulding cavity but, outside the moulding  
cavity, are spaced from one another to provide an  
20 annular reservoir. In use, polymerisable liquid is  
placed in the concave moulding surface, and the mould  
parts are juxtaposed so that an amount of the  
polymerisable liquid is trapped within the moulding  
cavity, the balance of the liquid being displaced  
25 into the annular reservoir. When the assembly is  
subsequently heated to cause polymerisation of the  
liquid in the moulding cavity, some shrinkage of the  
liquid occurs and, in spite of the abutment between  
the mould parts, some of the liquid is drawn from the  
30 annular reservoir into the moulding cavity so that  
the cavity remains filled, and the resulting moulded  
lens conforms fully to the profile of the moulding  
cavity.

However, a problem arises because the  
35 polymerisable liquid incorporates a readily volatile  
constituent and there is a danger that the liquid  
drawn from the reservoir into the moulding cavity

will not have the same composition as the polymerisable liquid in the moulding cavity, owing to volatilisation.

5 In accordance with the present invention, a pair of cast plastics mould parts for use in the moulding of ophthalmic contact lenses comprises a first part with a convex moulding surface and a second part with a concave moulding surface, the mould parts being arranged to be juxtaposed so that  
10 the two moulding surfaces define therebetween a moulding cavity for moulding a plastics contact lens, and, surrounding the moulding cavity, an annular reservoir from which, during shrinkage of a polymerisable liquid in the moulding cavity, a  
15 further amount of the liquid can be drawn from the reservoir into the cavity, the reservoir being substantially sealed by an annular seal which, in use, inhibits escape of any volatile constituent from the polymerisable liquid in the reservoir.

20 This arrangement ensures that any volatile constituent of the polymerisable liquid within the annular reservoir is prevented from escaping upon evaporation, so that any of the polymerisable liquid which is drawn from the annular reservoir into the  
25 moulding cavity is substantially of the same composition as that already in the cavity.

Preferably, each of the mould parts has a radially outwardly extending annular flange at the end of the reservoir remote from the moulding cavity,  
30 the annular seal being provided by a rib formed integrally with one of the flanges abutting an integral part of the other flange. The integral part of the other flange may then be a second rib, the two ribs having complementary abutting surfaces which are  
35 inclined to the mould axis. The mould parts may be arranged to be urged together, one of the flanges being flexible to allow the convex and concave

moulding surfaces to abut one another to define the periphery of the moulding cavity after the annular seal abutment has occurred.

The invention is illustrated by way of example with respect to the accompanying drawings, in which:-

Figure 1 is a diametrical section through a pair of mould parts; and,

Figure 2 is an enlargement of the right hand portion of Figure 1.

As shown in the drawings, first and second mould parts 4, 5 have convex and concave moulding surfaces 6, 7, which define therebetween a moulding cavity 8, delimited at its periphery by abutment between the mould parts 4 and 5. Outside the mould cavity, cylindrical portions 9, 10 of the mould parts 4, 5 define therebetween an annular reservoir 11. The reservoir is sealed by the engagement of complementary annular ribs 12, 13 formed integrally with annular flanges 14 and 15 of the parts 5, 4. The seal may be formed by engaging inclined annular surfaces 16 of the ribs. However, a similar result can be achieved if the rib 13 is eliminated, and the seal is formed between the rib 12, which may then have a knife-edge configuration, and the complementary face of the mould part 4. In any case, this abutment provides a primary limit to the axial approach of the parts 4 and 5, thereby providing a primary limit to the width of the mould cavity. Irrespective of this abutment, the essential limit will be provided at the periphery of the cavity 8 between the mould parts 4 and 5 because the mould part 4 is urged by a force  $F$ , e.g. of a spring, towards the part 5. The flange 15 then operates to a small extent as a diaphragm, flexing about the point of abutment with the rib 12. The deflection of the mould part 4 is shown, exaggerated, by the dotted lines 17 in Figure 2. However, the cooperation

between the rib 12 and the mould part 4 will effectively inhibit any significant loss of volatile constituent from the polymerisable liquid within the reservoir 11.

5

10

15

20

25

30

35

CLAIMS

1. A pair of cast plastics mould parts, for use in the moulding of opthalmic contact lenses, comprising a first part with a convex moulding surface and a second part with a concave moulding surface, the mould parts being arranged to be juxtaposed so that the two moulding surfaces define therebetween a moulding cavity for moulding a plastics contact lens, and, surrounding the moulding cavity, an annular reservoir from which, during shrinkage of a polymerisable liquid in the moulding cavity, a further amount of the liquid can be drawn from the reservoir into the cavity, the reservoir being substantially sealed by an annular seal which, in use, inhibits escape of any volatile constituent from the polymerisable liquid in the reservoir.

2. Mould parts according to claim 1, in which each of the mould parts has a radially outwardly extending annular flange at the end of the reservoir remote from the moulding cavity, the annular seal being provided by a rib formed integrally with one of the flanges abutting an integral part of the other flange.

3. Mould parts according to claim 2, wherein the integral part of the other flange is a second rib, the two ribs having complementary abutting surfaces which are inclined to the mould axis.

4. Mould parts according to claim 2 or claim 3, in which, in use, the mould parts are arranged to be urged together, one of the flanges being flexible to allow the convex and concave moulding surfaces to abut one another to define the periphery of the moulding cavity after the annular seal abutment has occurred.

5. A pair of cast plastics mould parts, substantially as described with reference to the accompanying drawings.

5

10

15

20

25

30

35